
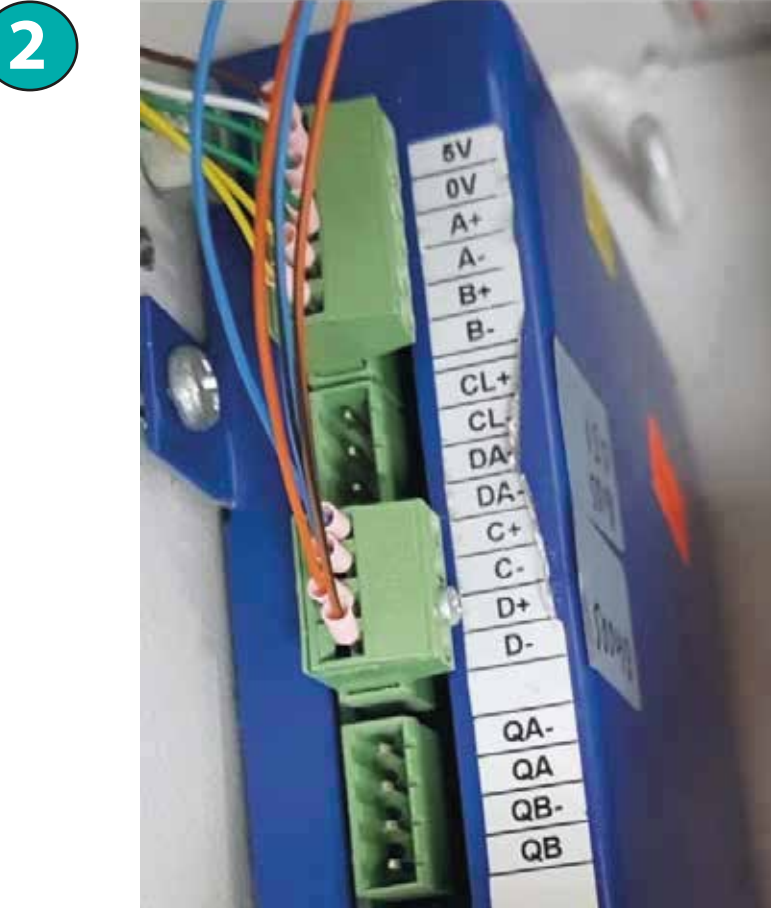


1 Connect 5V and 0V. Do not connect 24V!

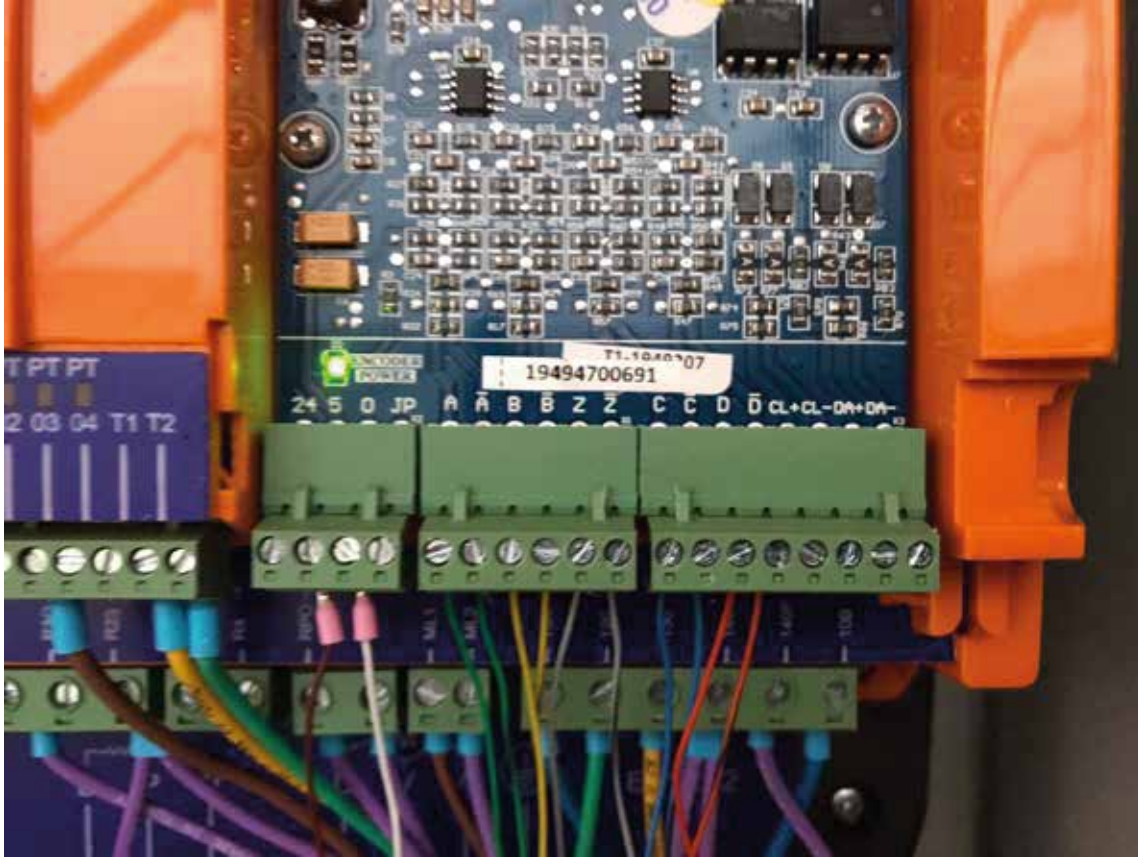

**Connect A+, A-, B+, B- channels.
Connect C+, C-, D+, D- channels.
Do not connect Z channels in
Arkel drive!
Do not connect CL ve DA channels!**

3 Color Codes

FNC SC 2048 - R700CH		V1.5	FENAC	CE
VDC	KAHVE (Brown)	C	MAVI (Blue)	
GND	BEYAZ (White)	C-	MAVI-SIYAH (Blue-Black)	
A	YEŞİL (Green)	D	TURUNCU (Orange)	
A-	YEŞİL-SIYAH (Green-Black)	D-	TURUNCU-SIYAH (Orange-Black)	
B	SARI (Yellow)	Z	GRI (Gray)	
B-	SARI-SIYAH (Yellow-Black)	Z-	GRI-SIYAH (Gray-Black)	

4 Selecting Encoder Type : Select Sincos 1 + Sincos 2048 option. If you select other encoder types, you get encoder error.

