

1 The inserted card must be a Sincos card.



2 Connect 5V and 0V. Do not connect 24V!


**Connect C+, C-, D+, D-
encoder channels
to CL+, CL-, DT+, DT-
terminal channels.**

**Connect A+, A-,
B+, B- channels.**

**Connect Z+ ,
Z- uçları channels**

Connect 5V ve 0V.

PE

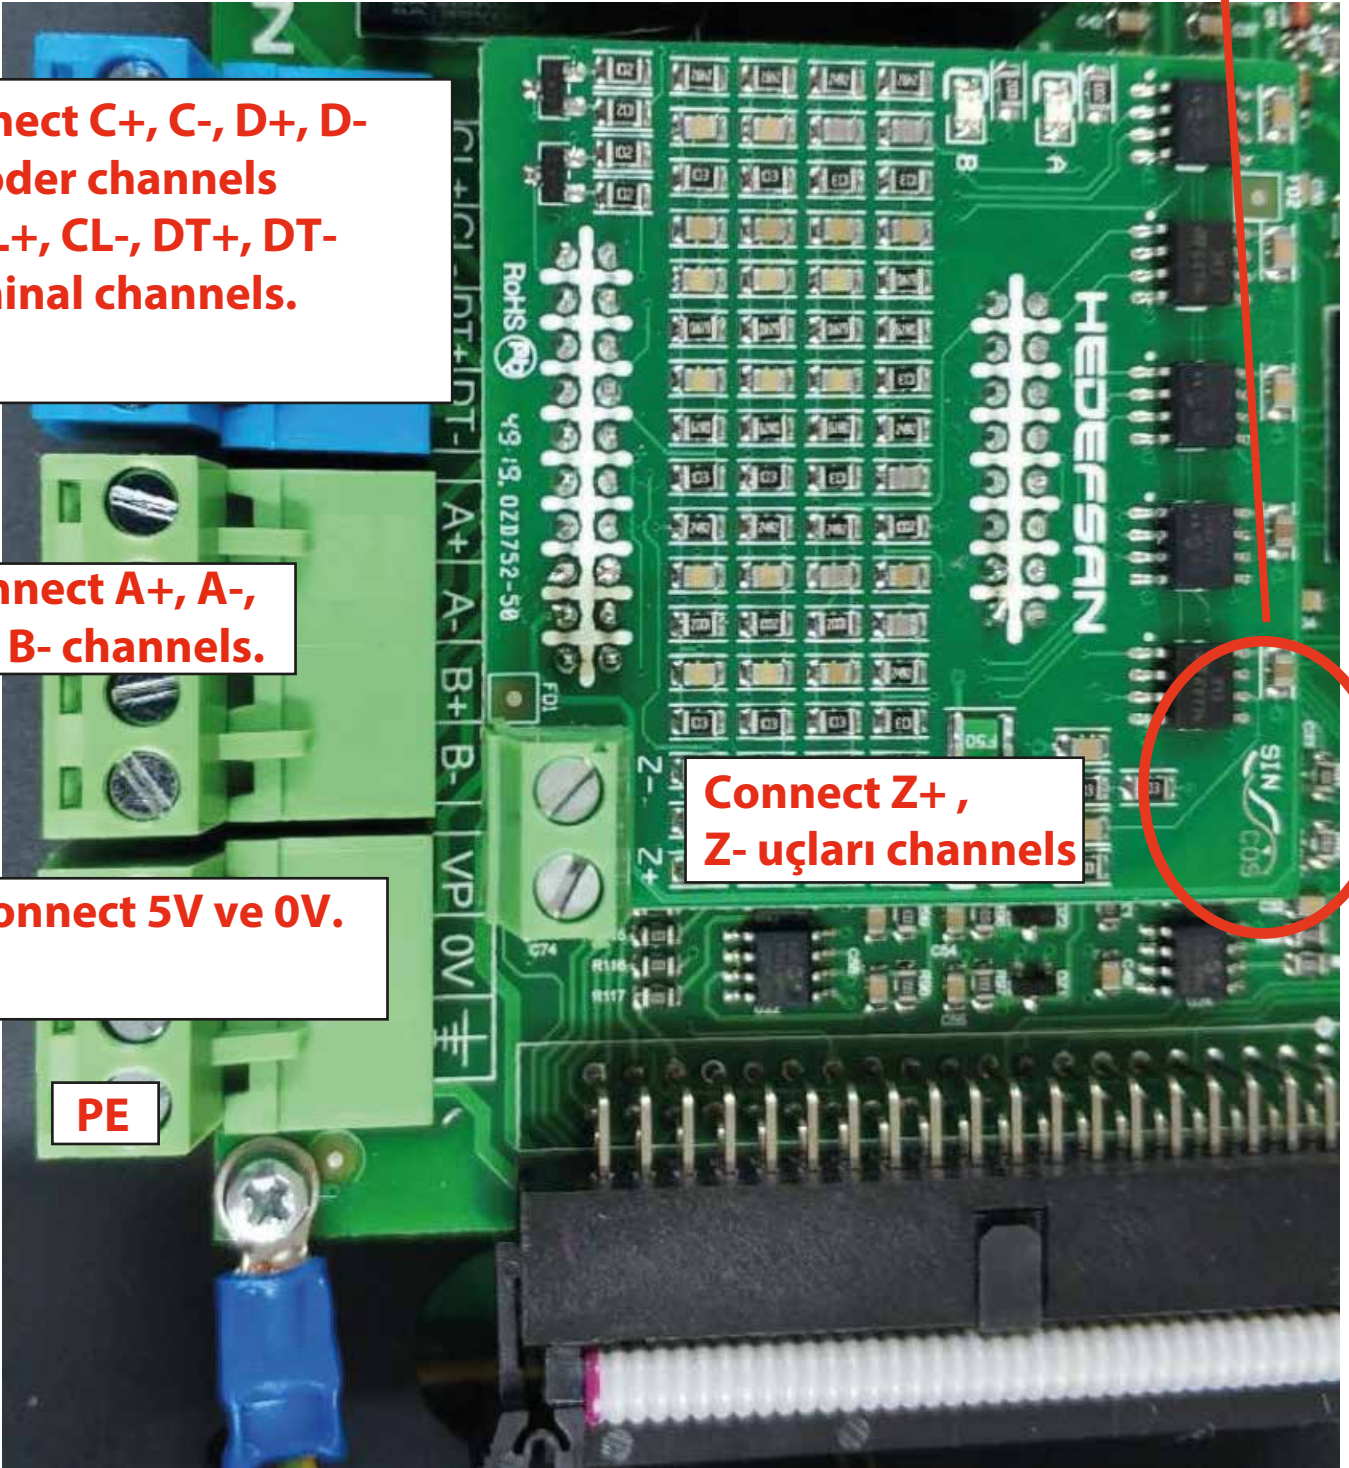

2 Color Codes

FNC SC 2048 - R700CH		V1.5	FENAC	CE
VDC	KAHVE (Brown)	C	MAVI (Blue)	
GND	BEYAZ (White)	C-	MAVI-SIYAH (Blue-Black)	
A	YEŞİL (Green)	D	TURUNCU (Orange)	
A-	YEŞİL-SIYAH (Green-Black)	D-	TURUNCU-SIYAH (Orange-Black)	
B	SARI (Yellow)	Z	GRİ (Gray)	
B-	SARI-SIYAH (Yellow-Black)	Z-	GRİ-SIYAH (Gray-Black)	

3 Selecting Encoder Type : Select Sin/Cos Encoder option. If you select other encoder types, you get encoder error.

