


**1 Connect 5V and 0V. Do not connect 24V!**

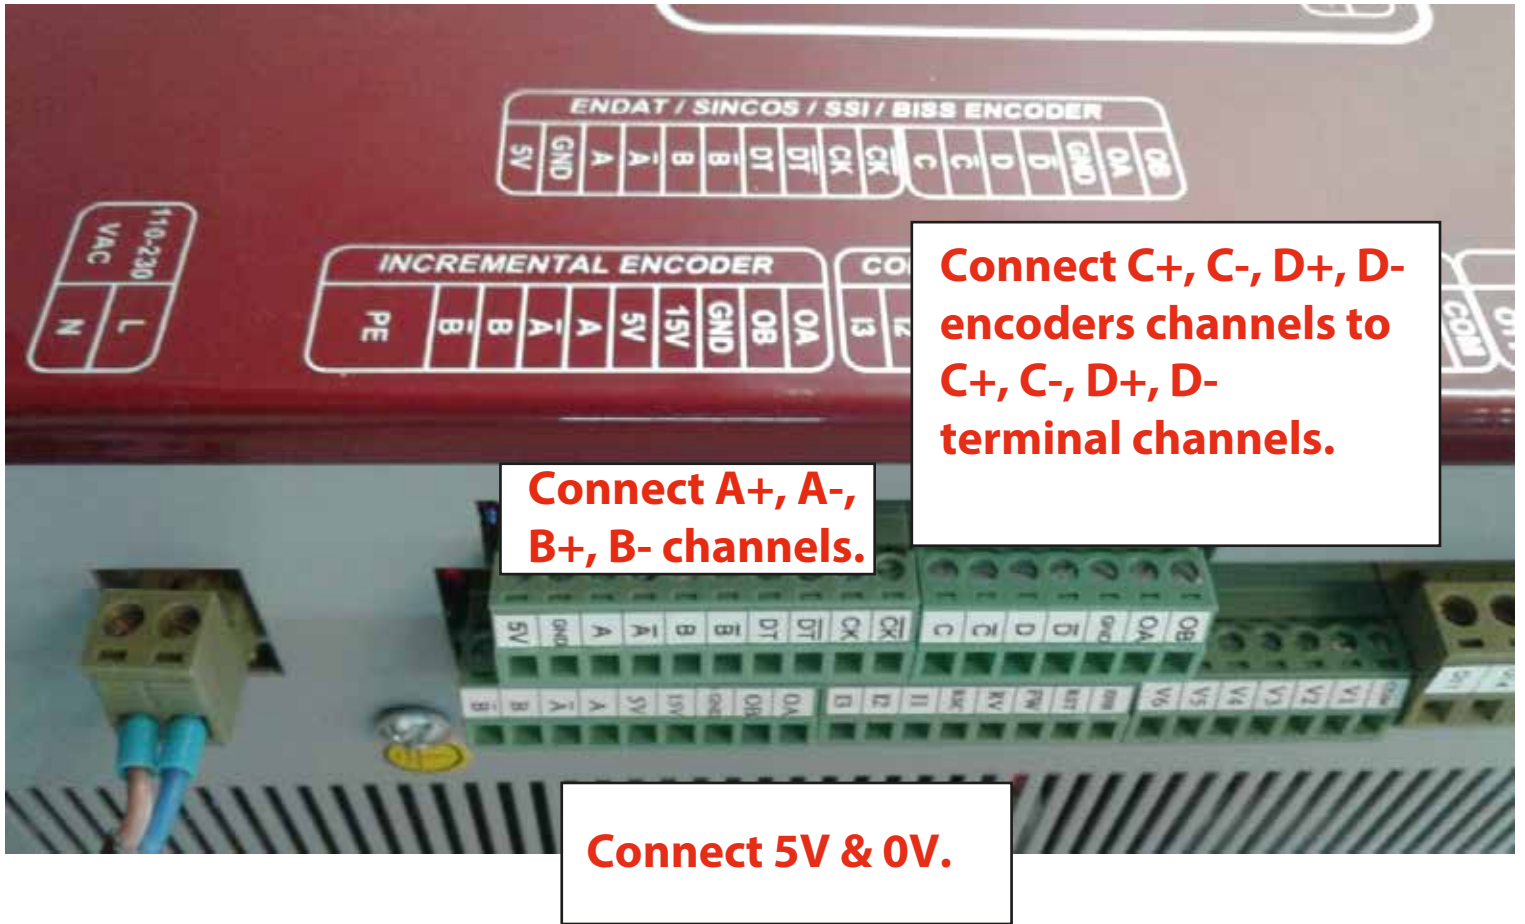

**2 Color Codes**

| <b>FNC SC 2048 - R700CH</b> |                           | V1.5 | <b>FENAC</b>                 | CE |
|-----------------------------|---------------------------|------|------------------------------|----|
| VDC                         | KAHVE (Brown)             | C    | MAVI (Blue)                  |    |
| GND                         | BEYAZ (White)             | C-   | MAVI-SIYAH (Blue-Black)      |    |
| A                           | YESIL (Green)             | D    | TURUNCU (Orange)             |    |
| A-                          | YESIL-SIYAH (Green-Black) | D-   | TURUNCU-SIYAH (Orange-Black) |    |
| B                           | SARI (Yellow)             | Z    | GRİ (Gray)                   |    |
| B-                          | SARI-SIYAH (Yellow-Black) | Z-   | GRİ-SIYAH (Gray-Black)       |    |

- 3** **Selecting Motor Type : Select Senkron motor type.**  
If you select other types, you get error.



- 4** **Selecting Encoder Pulse Type : Select M10: 2048 ppr.**  
If you select other types, you get error.



- 5** **Selecting Encoder Type :** Select M18: 2-SINCOS.  
If you select other types, you get error.

